



Misure in mm
Dimensions in mm

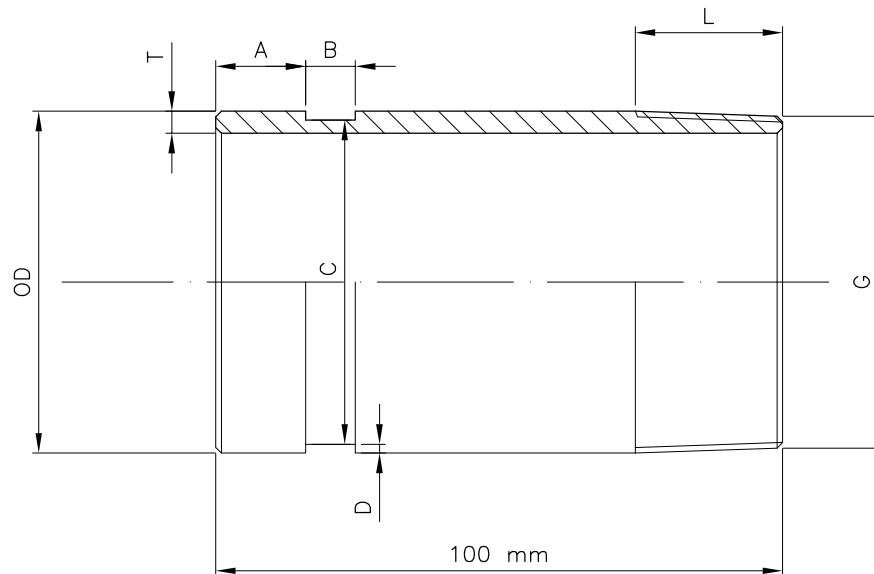

Diametro Nominale <i>Nominal Size</i>	Diametro Esterno <i>Outside Diameter</i>			Guarnizione Sede <i>Gasket Seat</i> "A" +/-0,76mm	Scanalatura Sede Groove Width "B" +/-0,76mm	Diametro Scanalatura Groove Diameter		Scanalatura Profondità Groove Depth "D" mm	Spessore Tubo Wall Thk. mm	Filetto GAS ISO 7/1 Thread BSPT "G"
	Effettivo <i>Actual</i> "OD"	Tolleranza <i>Tolerance</i> "OD"				Effettivo <i>Actual</i> "C" mm	Tolleranza <i>Tolerance</i> "C" mm			
mm - inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch
DN 32 - 1"1/4	42,4	0,74	-0,41	15,88	7,14	38,99	-0,38	1,6	5	1"1/4
DN 40 - 1"1/2"	48,3	0,48	-0,48	15,88	7,14	45,09	-0,38	1,6	5	1"1/2
DN 50 - 2"	60,3	0,61	-0,61	15,88	8,74	57,15	-0,38	1,6	5	2"
DN 65 - 2"1/2	76,1	0,76	-0,76	15,88	8,74	72,26	-0,46	1,93	5	2"1/2
DN 80 - 3"	88,9	0,89	-0,79	15,88	8,74	84,94	-0,46	1,98	5	3"
DN 100 - 4"	114,3	1,14	-0,79	15,88	8,74	110,08	-0,51	2,11	6,3	4"

MATERIALE MATERIAL
ACCIAIO S235 - UNI EN 10210
STEEL S235 - EN 10210

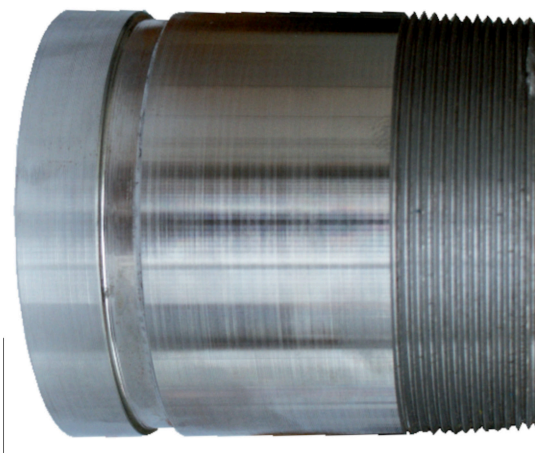

BOCCIOLONE ANTINCENDIO S.p.A.

Via Giacomo Grai, 1
28078 Romagnano Sesia (NO) - ITALY
Tel. 0163-568811
info@bocciolone.com - www.bocciolone.com

Niplo scanalato/filettato
Grooved x Threaded Nipple

DWG-917-01

Rev. 1

Data: 21/04/2026

Foglio: 1/1